

Product sheet part 1



CoatRack

CoatRack

W/H/D: 95/174/48 cm

Casters Ø 50 mm

Please note: For self-assembly

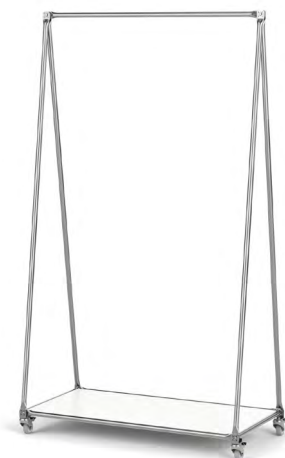

Product sheet part 2

CoatRack

Description

The CoatRack is a mobile wardrobe that provides additional storage space due to the bottom shelf.

Features

The CoatRack offers a clothes rail for storage with hangers and storage space on the shelf.

Packaging

For transport, the furniture is wrapped in packaging foil. Edges and corners are protected with cardboard edge protectors.

Assembly

The CoatRack is designed for self-assembly. Assembly instructions enclosed.

Service life

The product is extremely hardy when used as intended. The CoatRack conforms to the norms on strength, durability and safety contained in the DIN EN 15372: 2017-02 standard.

Design

Easily movable wardrobe with rectangular basic shape, W/H/D: 95/174/48 cm. Towards the top the frame tapers on both sides, forming a triangular shape. The frame consists of round tube stainless steel 20 x 1 mm, surface brushed or black powder-coated, on rubberized furniture casters with brakes. Easy assembly and disassembly.

The base plate consists of a MDF core with different surfaces such as melamine resin or real wood veneer.

Warning notices

Always secure the CoatRack with casters against rolling away by activating the brakes! If it is not secured, it can risk of injury if it is not secured.

Product sheet part 3

CoatRack

Care instructions

Melamine-coated tabletops

Melamine-coated tabletops can be wiped with a soft, dry, lint-free cloth during regular cleaning. Never let moisture accumulations soak into furniture edges and corners! Never allow moisture (from glass rims, plant pots, etc.) soak into the surface or edges of the furniture.

Water-soluble soiling can be wiped away using a well-wrung out damp cloth. You can add a small amount of a mild cleaning agent to the water. Never use caustic or scouring cleaning agents! Wipe dry after cleaning.

Natural wood surfaces

Veneer is natural wood and therefore just as sensitive when it comes to cleaning. The real wood veneer panels used at System 180 receive – to preserve its natural character – a coating with a UV varnish. This finish does not constitute a sealant. Never allow moisture to get on the surface of the (glass edges, planters, etc.) as this can damage the surface.

Wood surfaces should be cleaned regularly.

Loose dirt and dust

For regular cleaning, wiping the furniture with a soft, dry, lint-free cloth should be sufficient. Microfibre cloths are not recommended as they can scratch the surface.

Water-soluble soiling

If the dirt cannot be removed dry, then a well-wrung cloth can be used to remove the dirt. A small amount of a mild detergent can be added to the wiping water. Never use harsh, abrasive or solvent-containing cleaning agents! Subsequently wipe dry. Directly afterwards rub the surface dry without applying pressure.

Water-insoluble soiling

In the case of heavy soiling that cannot be removed using a damp cloth, no single recommendation can be given. (Please use only specially trained personnel for this purpose!)

Stainless steel parts

Stainless steel surfaces should be cleaned using cleansing cloths, soft sponges or brushes with clean, hot water, with all-purpose cleaner containing no abrasive ingredients where necessary. Before drying, all traces of detergent should be carefully removed.

Particular types of staining (e.g. limescale residues) may be removed with light acidic cleaning agents containing 10 % citric or acetic acid. Wipe all treated surfaces thoroughly to remove all residues.

Please note: The corrosion resistance of stainless steel may be reduced by acids and halogen compounds (chlorides, bromides, iodides). For this reason, no cleaning agents containing strongly acidic salts should be used. Such substances include decalcifiers based on formic acid and amidosulfuric acid, drain cleaning agents, hydrochloric acid and silver cleaning agents. Do not use any chloride solutions, caustic or abrasive substances (scouring powder, steel wool), nor polishes, wax or bleaching agents.

To avoid extraneous rust, do not use either cleaning utensils made of non-stainless steel (spatulas, steel wool) or other items previously used to clean non-stainless steel.

Product sheet part 4

CoatRack

Instructions for use

Brakes on the casters can be operated by foot.

Please note: To move the furniture, release the locks on all casters. Trying to move a piece of furniture while the brakes are in may result in a loss of function, excessive wear and to occasional damage to the brake mechanism. Rolling the furniture over curbs, uneven floors, steps or door thresholds may lead to a loss of function or excessive wear, and to components coming loose.

Disposal

The piece can be fully dismantled at the end of its useful life. Its components can be separated according to their various recycling classes and sent for recycling according to their waste code number (AVV).

- Frame, casters and small parts: 20 01 40 AVV (metals)
- Tabletop: 03 01 05 AVV (sawdust, chippings, off-cuts, wood, chipboard and veneers, with the exception of those included under 03 01 04).
- The piece may also be disposed of entirely intact as: 20 03 07 AVV (bulky waste).

Technical data sheet

CoatRack

| Material | Description | Value | Norm |
|-----------------------|--|-----------------------------|-------------------------------------|
| MDF StyleBoard, black | Attractive MDF panels with uniform structure coloured right through in black | | EN 622-5:1997 EN 622-3:2004 |
| | Gross density | 770-780 kg/m ³ | DIN EN 622-5 |
| | Longitudinal bending tensile strength | 8–28 N/mm ² | EN 310 |
| | Bending tensile strength across width | 0.1–0.4 N/mm ² | EN 319 |
| | Swelling over 24 hrs | 7–20 % | EN 314 |
| | Bending elastic modulus | 1600–2900 N/mm ² | EN 310 |
| | Fire performance | Normal flammability Ds2, d0 | |
| | Formaldehyde emission class | E1 | DIN EN 717-2 DIN EN 120 |
| | Harmless in contact with foodstuffs | | EN 1186 EN 13130 CEN/TS 14234 |
| | Surface texture VV – Gloss level | ≤ 20 gloss units | DIN EN 527 |
| Steel tubing | Ferritic corrosion-resistant stainless steel tubing 1.4509, brushed surface | Ø 20x1 mm | DIN EN 10217-7 |
| | Strength / Eddy current tested | 6000 mm, -0/+20 mm | EN 10204 |
| | Tolerance | D4/T3 | EN 1127 |

The CoatRack conforms to the norms on strength, durability and safety contained in the DIN EN 15372:2017-02 standard.